


WS (KYLMÄT) HALLIT

TYYPPI	KATTOKALTEVUUS	LUMIKUORMA (EC1) kN/m ²	KEHÄJAKO m	SISÄSEINÄKORKEUS m	SISÄHARJAKORKEUS m	KEHÄN RUNKOLEVEYS m
WS11	15°	2,5	4,8	5,60	6,09	11,00
		2,75	4,4			
		3,0	4,0			
WS11	27°	2,5	4,8	4,60	7,42	11,00
		2,75	4,4			
		3,0	4,0			
WS14	15°	2,5	4,4	4,60	6,49	14,00
		2,75	4,0			
		3,0	4,4			
WS14	27°	2,5	4,8	4,60	8,18	14,00
		2,75	4,4			
		3,0	4,4			
WS16	15°	2,5	4,4	4,60	6,76	16,00
		2,75	4,0			
		3,0	4,6			
WS16	27°	2,5	4,8	4,60	8,69	16,00
		2,75	4,4			
		3,0	4,6			
WS18	15°	2,5	5,0	4,60	7,03	18,00
		2,75	4,6			
WS18	27°	2,5	5,0	4,60	9,20	18,00
		2,75	4,6			
WS20	15°	2,5	5,0	4,60	7,30	20,00
		2,75	4,6			
WS20	27°	2,5	5,0	4,60	9,71	20,00
		2,75	4,6			
WS22	15°	2,5	5,0	4,60	7,30	22,00
		2,75	4,6			
WS22	27°	2,5	5,0	4,60	10,20	22,00
		2,75	4,6			
WS24	15°	2,5	5,0	4,60	7,30	24,00
		2,75	4,6			

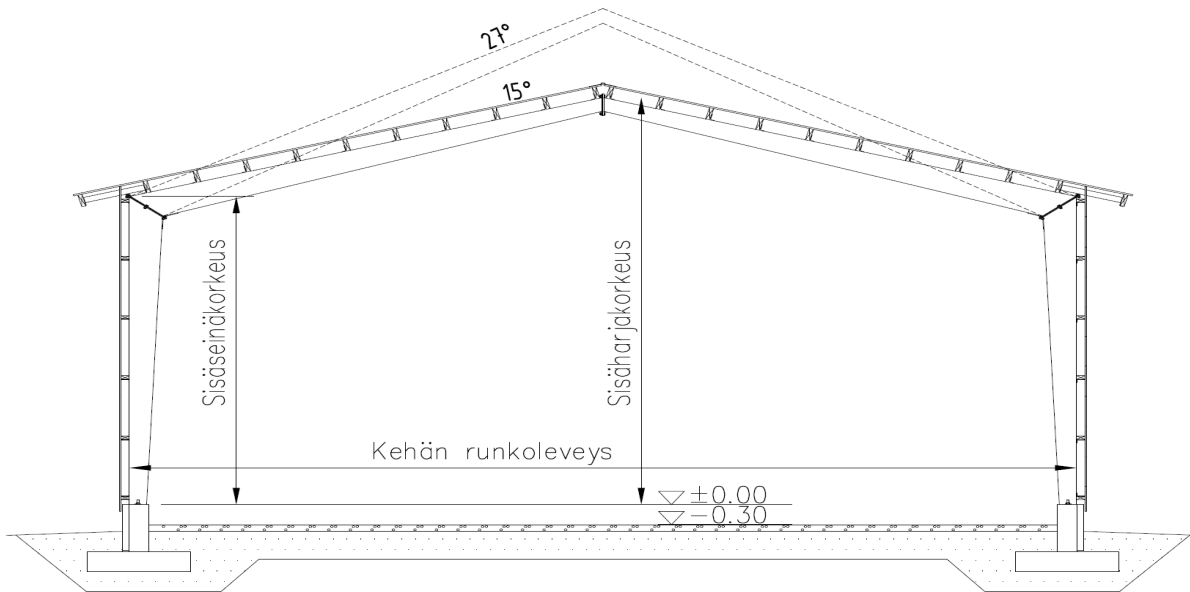

Weckman Steel Oy

Härkäläntie 72 • 19110 VIERUMÄKI • Puh. (03) 888 70 • Fax (03) 718 7839

Muovikatu 12 • 74120 IISALMI • Puh. (03) 888 70 • Fax (017) 814 493

WECKMAN