
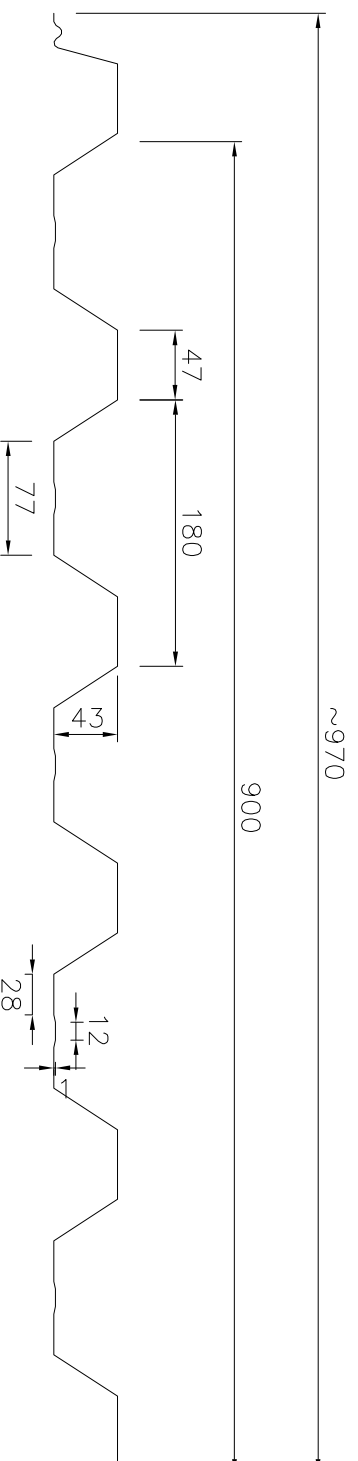


# W-45JR / 900



Rakko- $\alpha$ ine		DX51D+F(0,45mm); S280GD+Z (0,5mm); S320GD+Z (0,6mm); S350GD+Z (0,7...0,9mm)		
Poinnulevy	Vainitsija	Toleranssi	K $\ddot{u}$ yt $\ddot{a}$ kohde	
W-45JR/900	Weckman Steel Oy H $\ddot{a}$ k $\ddot{a}$ lantie 72 19110 Vierum $\ddot{a}$ ki	SFS-EN-14782	Vesikatto	
Pirtti		<b>W45JR V</b> Weckman pid $\ddot{a}$ t $\ddot{a}$ t $\ddot{a}$ kaikki oik $\ddot{e}$ udet muut $\ddot{o}$ ksiin		
Suunn.				KN 14.10.-96
Tark.				Massa (0,5 mm levy) 5,56 kg/m $^2$
Hyy.				