


# W-130/950

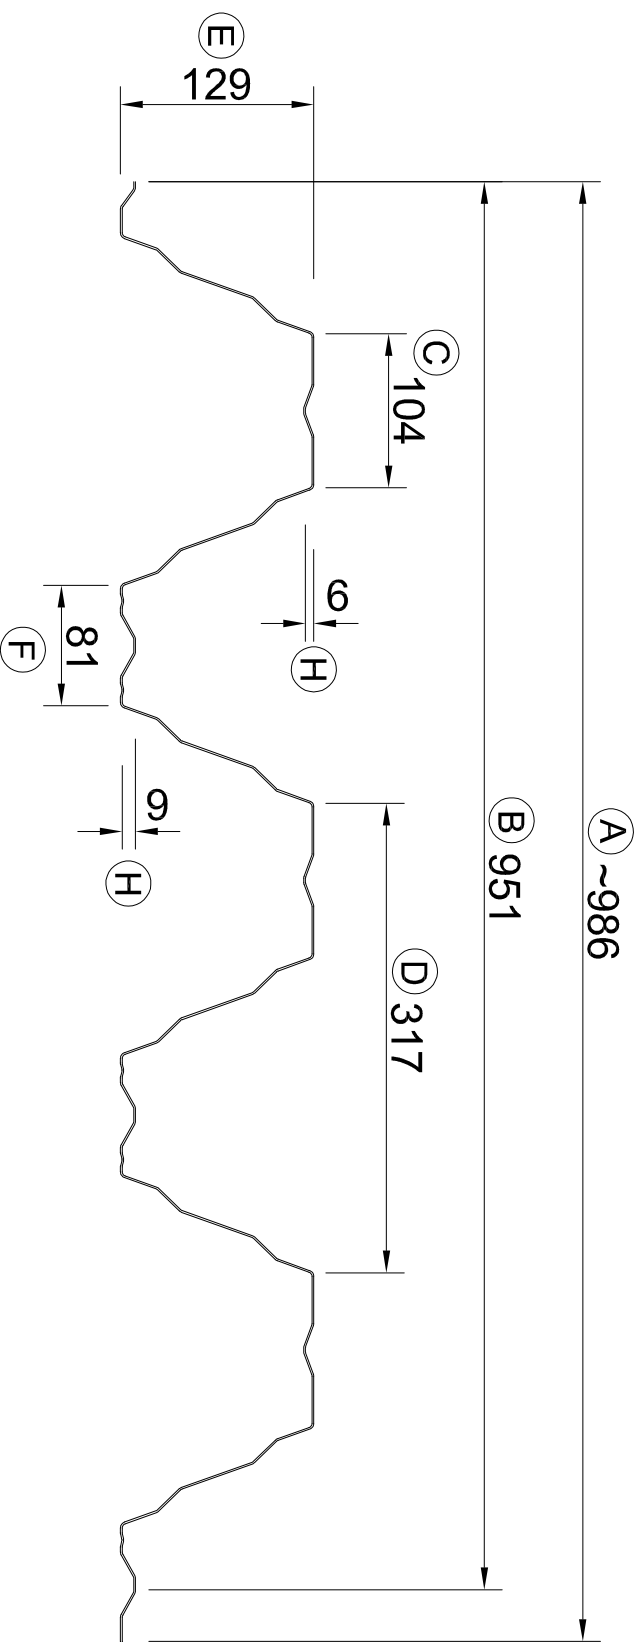

Measure	Length	EN 1090-4 Annex D	Target in production
A		-	deviation to the edge of sheet leaving nethermost in overlapping
B (w)		+/- 13 mm	+/- 13 mm
C (b)		+4 mm/- 1 mm	+ 2 mm/- 1 mm
D (br)		+/- 4 mm	+/- 4 mm
E (h)		+/- 2 mm	+ 2 mm/- 1 mm
F (b)		+4 mm/- 1 mm	+ 2 mm/- 1 mm
G (l)	L ≤ 3000 mm L > 3000 mm	+10mm/- 5 mm +20mm/- 5 mm	+ 10 mm/- 0 mm + 20 mm/- 0 mm
H (h <sub>1</sub> )		+3mm/- 1mm	+ 3mm/- 1mm
I (hr)		-0,15x v ≤1/+2	-0,15x v ≤1/+2

### Tolerances

Material	S350GD+Z275 tai S350GD+Z100		width 1500 mm		
Product	W-130/950	Manufacturer	Weckman Steel Oy Hätkälantie 72 19110 Vierumäki		
Draw.	17.10.13 MS		Drawing no. <b>ENW130K</b>		
Rev.	13.06.22 MS			Tolerances	SFS EN-1090-4
Insp.				Purpose of use	<b>Roof/wall/ceiling</b> Nominal thicknesses 0,7; 0,8; 0,9; 1,0; 1,2; 1,50 mm
Appr.		Mass (1,0 mm sheet)	12,45 kg/e-sqm		
All rights reserved					